

HEATER

SALES & SERVICE

Member of the CRA (Canadian Rental Association)


Direct Fired Construction Heaters

FEATURES AND SPECIFICATIONS



F-150

Adjustable heat from 50,000 to 150,000 BTU/hr

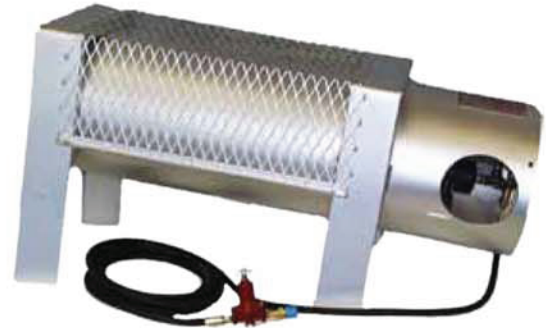

F-375

Adjustable heat from 220,000 to 375,000 BTU/hr

MODEL	F-150	F-375
Fuel	Vapor Propane	Vapor Propane
Input		
Maximum	150,000 btuh	375,000 btuh
Minimum	50,000 btuh	220,000 btuh
Manifold Pressure	2-1/4 to 20 PSI	7 to 20 PSI
Hose Length	20 Feet is standard	20 Feet is standard
Regulator With POL	Adjustable to 20 PSI max.	Adjustable to 20 PSI max.
Approval	UL of Canada Listed	UL of Canada Listed
Weight	32 lbs	65 lbs
L x W x H	30" x 11.25" x 14"	42" x 17" x 22"
Air Outlet	8" Diameter	13" Diameter
Fuel Consumption	.54 to 1.63 lbs/hr	2.39 to 4.09 lbs/hr
Ignition	Manual	Manual
Optional Fan	N/A	800 CFM fan assembly (120V)



2001-S2
2 cylinder manifold



2001-S3
3 cylinder manifold

www.heatersales.ca

801-25 Avenue
Nisku, AB Canada T9E 7Z4

Telephone: 780-979-0220
Fax: 780-955-8781